

miidii

manual



random works

Overview

miidii lets you use midi to play the alternate modes of Mannequins Just Friends.

Connect the modules via i2c and use midi trs (type a) or usb-c to play Just Friends either polyphonically or as six monosynth voices.

With the switch in the middle position, Just Friends is played polyphonically.



In the down position, each of the six Just Friends voices is controlled by a separate midi channel.

In the up position the module is disabled and Just Friends is returned to its default mode.

miidii is a midi client which does not provide power. To send it midi through the usb-c socket it must be connected to a midi host.

Installation

1. Turn off your eurorack system before installing the module
2. Connect an i2c cable from Just Friends to miidii. Both modules have two of each pin to allow you to daisy chain i2c modules together but you only need to connect one of each between the two modules. Remaining i2c pins can be left unconnected if you don't have other i2c modules

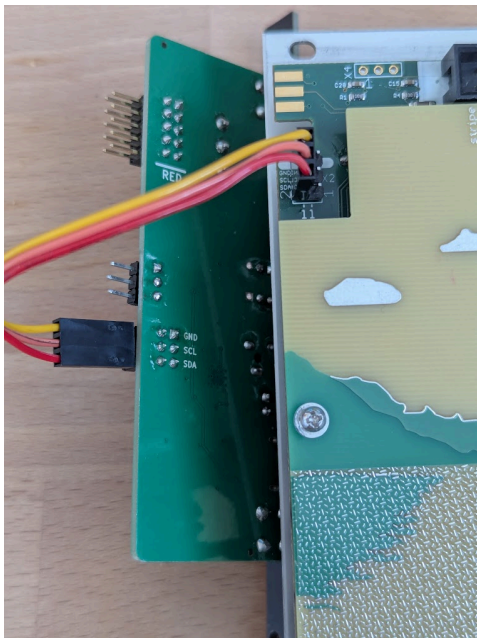

3. Power on your eurorack system and enjoy your new module

Note to avoid damage to miidii and other modules in your system, please ensure that no other modules or metal case components are touching the miidii circuit board when you install it.

Usage

To get started you will probably want Just Friends set to 'sound' in 'transient' mode with 'intone' (speed) fully counterclockwise and 'time' (release) at around 50%.

Once you get a feel for it, experiment with different settings and modes.

The internal envelope of Just Friends is triggered upon receiving midi 'note on' messages using the provided note and velocity.

miidii uses midi channel 1 by default but you can change this and other settings by connecting a usb cable to your computer and using the web configuration tool at

<https://random-works.co.uk/modules/miidii/configure.html>

FAQ

What type of midi cable do i need?

You can use a midi type-a trs cable.

Miidii is a usb midi client so you need to connect it to a usb midi host if you want to use it via the usb-c socket.

Can i use a longer i2c cable?

Yes, any 2.54mm (0.1") pitch female/female jumper wire (sometimes known as a dupont cable) can be used.

You may run into problems with very long cables so keep it as short as you can.

You should be able to get one from an electronics hobbyist / maker store such as Adafruit or Pimoroni.

I'm having trouble with the configuration tool

Google Chrome works best - make sure you give it permission to use midi devices if prompted.

If you are using Windows, close any other applications that may be using midi.

Technical Details

width: 2HP


depth: 55mm

power: 12v 35mA, -12v 0mA, 5v 0mA

Updating Firmware

To update the firmware on the module:

1. Start with your eurorack system turned off and the power cable connected to the module.
2. While holding down the button on the miidii circuit board, turn on your eurorack system.

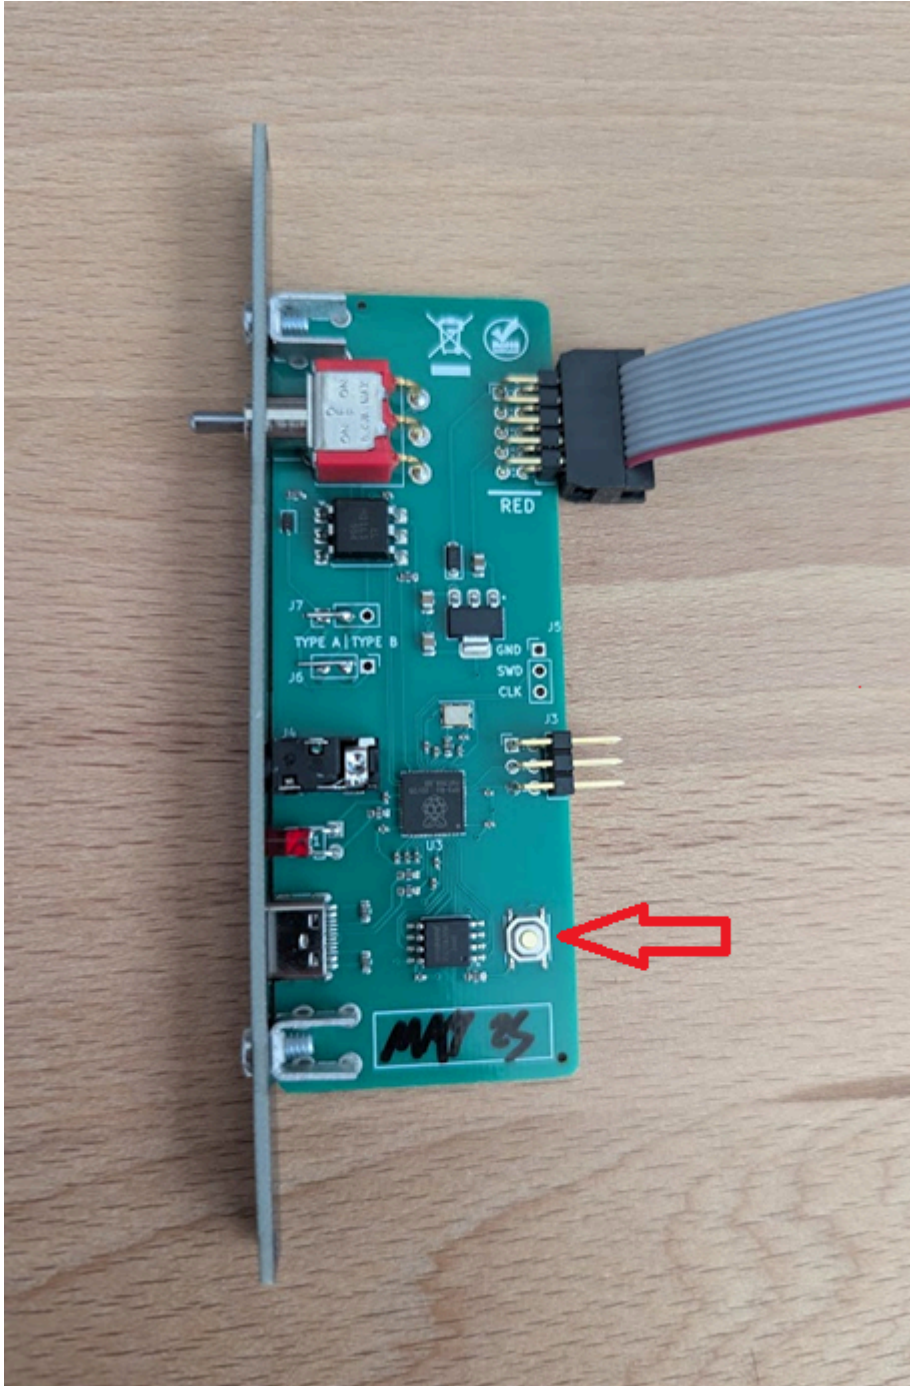

3. Connect a USB cable from the module to a computer
4. The module will now show as a drive on your computer containing a .HTM and .TXT file. Copy the firmware UF2 file onto the module. When it has finished, the module will disconnect and reboot with the new firmware.